660SJC CRAWLER

TELESCOPIC BOOM LIFTS



Performance		
Platform Height	65 ft 7 in.	19.99 m
Horizontal Outreach	57 ft 0.6 in.	17.39 m
Swing	360° Continuous	
Platform Capacity		
Restricted/Unrestricted	750/550 lb	340/249 kg
Platform Rotator	180° Hydraulic	
Jib Range of Articulation	132°	+71, -61
Weight ¹	29,339 lb	13,308 kg
Max. Ground Bearing Pressure	6.5 psi	0.457 kg/cm ²
Drive Speed	1.6 mph	2.6 kmph
Gradeability	55%	
Turning Radius	Zero	
Type of Tracks	Steel	
Tracks Width	1 ft 7.7 in.	0.5 m

1. Certain options or country standards will increase weight.

Standard Specifications

otaliaala openiitaa			
Engine			
Diesel Engine, Deutz TD2.9L4 Tier 4 Final	67 hp	50 kW	
Fuel Tank Capacity	31 gal	117 L	
Auxiliary Power	12V DC		
Hydraulic Reservoir			
Capacity	34 gal	129	

Standard Features

- 36 x 96 in. (0.91 x 2.44 m) Platform
- Customized Crawler Chassis
- Steel Link Tracks
- · Inward Swing Gate
- 180 Degree Hydraulic Platform Rotator
- Platform Console Machine Status
- Light Panel¹
- 110V-AC Receptacle in the Platform
- 5-degree Tilt Alarm/Indicator Light
- Swing-out Engine Module
- Gull-wing Engine Hood
- 12V-DC Auxiliary Power
- Proportional Controls

- Lifting/Tie Down Lugs
- Hourmeter
- Bolt-on Lifting Lugs
- Horn
- Motion Alarm
- Interactive Display at Ground Controls
- Control ADE System
- SkyGuard®



Accessories & Options

- 36 x 72 in. (0.91 x 1.83 m) Platform
- Platform Work Lights
- Bolt-on Aluminum Mesh to Top Rail
- Light Package
- Flashing Amber Beacon
- Cold Weather Kit²
- Hostile Environment Kit³
- Arctic Package⁴
- Inward Self-closing Swing Gate
- Fall Arrest Platform 36 x 72 in. (0.91 x 1.83 m)
- 1/2 in. Air Line to Platform
- 1. Provides indicator lights at platform control console for system distress, low fuel, 5-degree tilt light

- Provides indicator lights at platform control console for system distress, low fuel, 5-degree tilt light
 and footswitch status.
 Includes engine block heater, battery heater and oil tank heater.
 Includes console cover, boom wipers and cylinder bellows.
 Includes artic hydraulic hoses (drive and steer only) and main boom cable, arctic hydraulic oil, extreme cold
 engine oil, anti-freeze, fuel conditioner, engine block heater, battery blanket, glow plugs, hydraulic tank
 heater, and oversized footswitch.

• Soft Touch System

• Spark Arresting Muffler

- SkyPower® Package

- SkyWelder® Package

- SkyGlazier® Package

• Operator Tool Tray

Accessory Packages

• Special Hydraulic Oils (consult factory)

• AC Generator


660SJC CRAWLER

TELESCOPIC BOOM LIFTS




Dimensions

All dimensions are approximate.

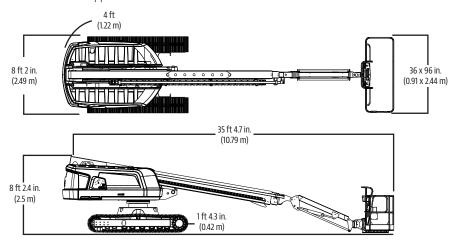

Reach Diagram

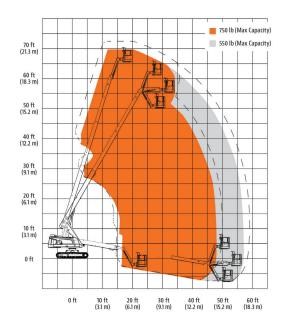

The JLG "1 & 5" Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



JLG Industries, Inc.

1 JLG Drive McConnellsburg, PA 17233-9533 Telephone 717-485-5161 Toll-free in US 877-JLG-LIFT Fax 717-485-6417

www.jlg.com

An Oshkosh Corporation Company