



JLG<sup>®</sup>  
TELEHANDLERS

**JLG**<sup>®</sup>



## Meet Your Tough Telehandler Lineup.

Your productivity is on the line the minute you climb into the telehandler cab. The lineup of JLG® all-wheel steer telehandlers gives you all the power, reliability and maneuverability you've come to expect from a world-leading equipment manufacturer. With capacities from 5,500 to 12,000 lb and heights up to 55 ft, you can handle any job site challenge with these pick and place telehandlers. From commercial and residential construction to steel work and framing, JLG telehandlers can get you around crowded work areas to get the job done.



Single joystick controls provide easier boom positioning while a wide variety of attachments help you jump into new lifting challenges in seconds. Think of your JLG telehandler as a productivity tool with the ability to bring the impossible within reach. Backed by the industry's best service, parts and support. So your productivity is always at its peak. Job after job.

Your day won't seem so tough or your loads so heavy—if you let the power of JLG do the heavy lifting.

## JLG® Telehandlers

### FOUR WHEEL STEER MODEL RANGE



#### Model G5-18A

The tough Super Compact from JLG lets you maneuver around the job site with ease, thanks to its 126-inch turning radius. And with up to 5,500 lb capacity and 18 ft of lift height, you have all the strength and power you need for the most productive day possible.

Max. Capacity: 5,500 lb (2,495 kg)

Max. Lift: 18 ft (5.5 m)



#### Model G6-42A

With all-wheel steer maneuverability, a powerful side-mounted engine, and a spacious cab with wrap-around dash, it's easy to see how the JLG model G6-42A telehandler will help boost your productivity. Move quickly and efficiently around job sites with up to 6,600 lb loads of block, brick and other materials.

Max. Capacity: 6,600 lb (2,994 kg)

Max. Lift: 42 ft (12.8 m)



#### Model G9-43A

The JLG model G9-43A telehandler delivers the capacity to lift, move and place up to 9,000 lb of materials including lumber, blocks and trusses. A larger cab allows better visibility while all-wheel steering provides improved access and maneuverability on tight job sites.

Max. Capacity: 9,000 lb (4,082 kg)

Max. Lift: 43 ft (13.11 m)



#### Model G10-43A

Quick boom speeds and 10,000 lb capacity on the JLG G10-43A help keep productivity high on every job site. A tight turning radius and 18 inches of ground clearance maximize maneuverability around the roughest working areas while a diverse range of attachments—including buckets, truss booms, towers and work platforms— increase versatility.

Max. Capacity: 10,000 lb (4,536 kg)

Max. Lift: 43 ft (13.11 m)



#### Model G10-55A

The JLG model G10-55A telehandler offers 55 ft of lift height for placing loads higher than most other telehandlers can go. And with 10,000 lb capacity, a spacious operator cab, all-wheel steering and Quick-Switch® attachments, you've got a powerful productivity tool on any job site.

Max. Capacity: 10,000 lb (4,536 kg)

Max. Lift: 55 ft (16.76 m)



#### Model G12-55A

Our biggest and strongest yet, the JLG model G12-55A telehandler features 12,000 lb capacity and lift height of 55 ft, making it ideal for heavier applications like bridge construction, shoring, crib work and steel work.

Max. Capacity: 12,000 lb (5,443 kg)

Max. Lift: 55 ft (16.76 m)

**Versatile Attachments**

Choose from a wide range of attachments to keep productivity high, such as swing carriages, grapple buckets and fork-mounted work platforms.

**Ultra-Strong Boom**

Lift higher and farther with more confidence with a boom strong enough to handle heavy application work.

**Side-Mounted Engine**

Combined with a high boom pivot and large cab, you've got better visibility.

**Large Cab**

With a wide cab, adjustable seating and 360-degree visibility, you'll be placing loads in greater comfort.

**Single Joystick**

Control boom lift and telescope for more precise positioning.

**Drivetrain**

Equipped with transmissions and axles that provide efficient control and durability while traveling around the job site.

**Three Steering Modes**

Front wheel, all-wheel and crab steer improve maneuverability around the job site.





## Reach New Levels of Control and Comfort.

Your job becomes easier when you have a clear view of the job site. The engine position, boom pivot and cab position make for better visibility. While cab-mounted controls, a wrap-around dashboard and easy-to-read gauges let you know exactly what you're doing and where you need to be.

Designed with the operator in mind, the spacious cab with suspension seat allows the operator to work in comfort.

## Let JLG Do the Heavy Lifting.

A dominant presence on the job site, these telehandlers live up to their tough reputation. Choose from six models with capacities ranging from 5,500 to 12,000 lb and reach heights up to 55 ft. Lift, move and place materials like lumber, block and trusses with confidence. Larger models, like the G12-55A, are ideal for heavier applications like bridge construction, oil refineries and steel work.




## Test-Driven. Job Site Proven.

Our commitment to engineering and testing means that our telehandlers provide you with high performance when you need it most.

Our modern test facility is designed to provide the most realistic construction environment possible. Advanced reach and load placement technologies are tested and refined to improve capacity, boom speed and accuracy.

Steering and drive performance are tested on the limestone steering course and in fording our mud pit. Durability and extended driving are tested using our crosstie, pothole and high speed roading courses. Our engineers and technicians conduct these tests, and more, so they understand what you're experiencing on the job site.

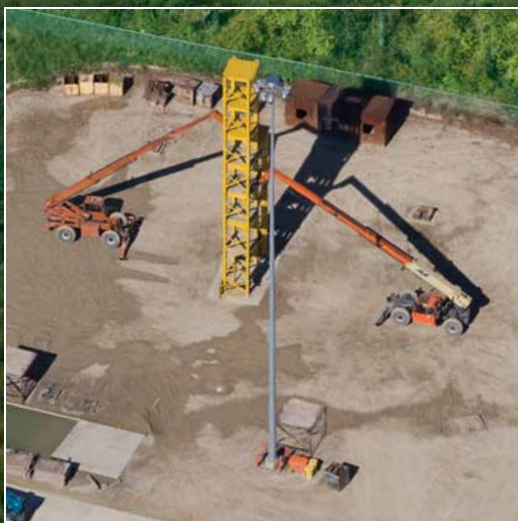



JLG® Telehandlers  
ORRVILLE TEST TRACK



## All Access for All Terrain.

JLG® telehandlers let you conquer the job site and work around obstacles, thanks to the three distinct steering modes that give you the access you need. Drive over varied terrain with greater ease. With up to 19 inches of ground clearance, you've got more room to travel over debris. A 144-inch turning radius, on the G6-42A and G9-43A, makes navigating tight areas less challenging. So you can maneuver your way to the most productive day possible.


### DEPENDABLE STABILITY

The solid overall design of these telehandlers means you can depend on them to carry loads up to 5,000 lb capacity at maximum lift height, and still have enough power to handle the biggest jobs.



## Go Places in Tight Spaces.

The JLG® G5-18A super compact telehandler lets you go anywhere you need to work. Low machine heights give you access to places other machines can't go, like parking garages. Load sensing hydraulics provide a smoother feel and increased boom control. Three steering modes and four-wheel drive give you the maneuverability you need, while a strong boom gives you the confidence to precisely place loads.

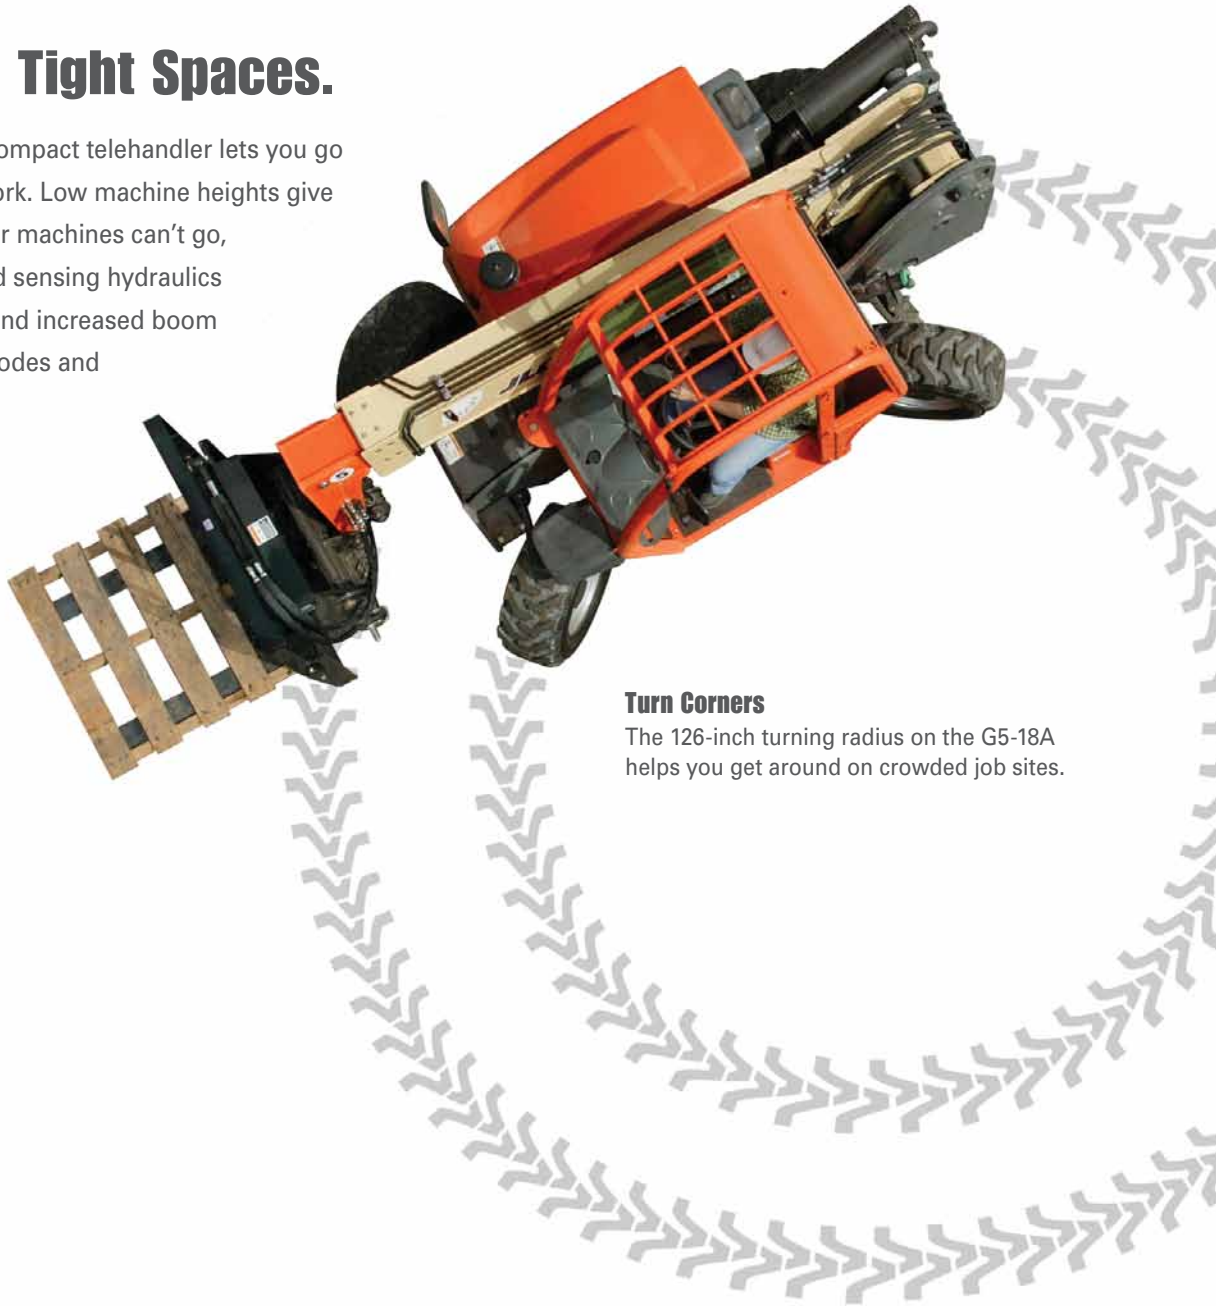

### Turn Corners

The 126-inch turning radius on the G5-18A helps you get around on crowded job sites.

### CHOOSE YOUR STEERING MODE



Front wheel steer when driving on the road.



All-wheel steer to help reduce the turning radius in confined areas.



Crab steer for sideways movement and precise positioning before lifting.

**JLG® Telehandlers**  
 OPTIONS & ACCESSORIES



**Enclosed Cab**



**Hitches†**



**Air Ride Seat†**



**Rotating Beacon**



**Pintle Hook\***



**2nd Auxiliary Hydraulics†**



**Molded Floor Mat†**



**Radio Ready Kit†**



**Tilt Steering†**



**Fenders**



**Brick Guard**




**Air Conditioning**



**Road Lights**



**Work Lights**



\*Not available on the G5-18A. † Available on the G5-18A only.

## Firestone Tires Last Longer

JLG® compact telehandlers are exclusively equipped with Firestone DuraForce MH tires. Less susceptible to sidewall damage, the new Firestone tires last up to 3 times longer than the Firestone SGG telehandler tires and lower your cost of ownership. And because they're available in unique sizes, there are fewer parts to stock—resulting in reduced inventory carrying costs.

### ADVANTAGES

- Lasts up to 3 times longer than the Firestone SGG telehandler tires
- Lower profile minimizes the opportunity for sidewall damage
- Unique self-cleaning tread design enhances terrainability
- Fewer assembly combinations reduce inventory carrying costs
- Backed by Firestone's industry-leading support

Contact your JLG Distributor or JLG Sales Representative for more information.



A self-cleaning tread pattern provides lower ground bearing pressure to optimize performance in rough terrain.





**Standard Carriage**

Forks that are fully floating and adjustable side-to-side for efficient load entry and exit.



**Side-Tilt Carriage**

Allows for minor lateral positioning of the load during final placement.



**Swing Carriage**

Allows for greater versatility in moving and placing materials in confined areas or when exact positioning is required.



**Dual Fork Positioning Carriage**

Provides the ability to adjust the position of each fork independently, allowing the operator to handle a variety of palletized loads without having to leave the cab.



**Pallet Forks**

Rugged design makes it easier to handle heavy palletized material.



**Lumber Forks**

Wider width provides a larger surface area for stability when transporting longer material.



**Cubing Forks**

Allows operator to load, unload and place cubes of brick and block with ease.



**Material Bucket**

Clean up the job site, spread gravel or for loading and leveling.



**Grapple Bucket**

Features a hydraulic grapple arm to assist in job site cleanup.



**Tower**

The tower increases lift height by eight feet.



**Sheet Material Adapter**

Avoid sheet material damage and speed up unloading and placement through doors and windows.



**Truss Boom**

Allows operator to set trusses and wall sections for wood and steel building construction. Available with or without winch.



**Fork-Mounted Work Platform**

Extend the capabilities of your telehandler and get more work done by lifting material and persons to working heights.



**Lifting Hook**

Add versatility to any standard carriage by lifting and lowering objects without changing attachments.



**Universal Skid Steer Adapter†**

Compatible with many existing skid steer attachments.

† Available on the G5-18A only.  
Not all options and attachments may be available for all models. Photographs are representative of attachments and options. JLG reserves the right to make modifications without prior notification.

# Putting Your Work Above Everything.

When it comes to JLG® Ground Support, it's all about you. Your productivity. Your profitability. Your uptime. From the purchase of your first piece of equipment straight through to the training, parts and maintenance that follows.



## Customer Service Call Center

You can be assured we'll be giving an all-out effort to support you. Just think of us as your personal on-call, full-service support team. We make it happen. Period.

## Aftermarket Parts

Keep your equipment running at peak performance with genuine replacement parts, accessories, attachments, rebuilt and competitive parts all from one source—JLG.



## Financial Solutions

Maximizing your profits. Preserving your cash flow. Let our financing specialists help choose the program designed specifically for your needs.



## Training

Knowing your equipment inside and out results in higher productivity on the job. Our instructor-led courses give you the hands-on time you need for success.

## Service Centers


Your needs. Your uptime. JLG is on the job to fulfill your every need, from repair, reconditioning, same-day parts and much more. We're here to support you.



**JLG® Telehandlers**  
FOUR WHEEL STEER SPECIFICATIONS

	<b>G5-18A</b>	<b>G6-42A</b>	<b>G9-43A</b>	<b>G10-43A</b>	<b>G10-55A</b>	<b>G12-55A</b>
Rated Capacity @ 24 in. (610 mm) Load Center	5,500 lb (2,495 kg)	6,600 lb (2,994 kg)	9,000 lb (4,082 kg)	10,000 lb (4,536 kg)	10,000 lb (4,536 kg)	12,000 lb (5,443 kg)
Maximum Lift Height	18 ft 4 in. (5.49 m)	42 ft (12.8 m)	43 ft (13.11 m)	43 ft (13.1 m)	55 ft (16.76 m)	55 ft (16.76 m)
Capacity @ Maximum Lift Height	4,400 lb (1,996 kg)	6,000 lb (2,721 kg)	7,000 lb (3,175 kg)	7,000 lb (3,175 kg)	*5,000 lb (2,268 kg)	*5,000 lb (2,268 kg)
Maximum Reach	10 ft 11 in. (3.33 m)	29 ft (8.84 m)	30 ft 6 in. (9.3 m)	30 ft 6 in. (9.3 m)	42 ft (12.8 m)	42 ft (12.8 m)
Capacity @ Maximum Reach	1,850 lb (839 kg)	1,000 lb (454 kg)	1,200 lb (544 kg)	2,300 lb (1,043 kg)	*3,000 lb (1,361 kg)	*3,500 lb (1,588 kg)
Approximate Operating Weight	10,800 lb (4,899 kg)	20,400 lb (9,253 kg)	25,907 lb (11,751 kg)	26,801 lb (12,157 kg)	34,400 lb (15,604 kg)	35,100 lb (15,921 kg)
A. Length (Less Forks)	144.2 in. (3.66 m)	212.6 in. (5.4 m)	237 in. (6.02 m)	233 in. (5.9 m)	240 in. (6.1 m)	240 in. (6.1 m)
B. Width	71.5 in. (1.8 m)	97.2 in. (2.47 m)	97.2 in. (2.47 m)	98.2 in. (2.49 m)	101.3 in. (2.57 m)	101.3 in. (2.57 m)
C. Height	75.6 in. (1.9 m)	94 in. (2.39 m)	95.5 in. (2.43 m)	95.5 in. (2.43 m)	101 in. (2.57 m)	101 in. (2.57 m)
D. Wheelbase	90 in. (2.29 m)	128 in. (3.25 m)	132 in. (3.35 m)	132 in. (3.35 m)	144 in. (3.66 m)	144 in. (3.66 m)
E. Ground Clearance	10.8 in. (274 mm)	16.4 in. (417 mm)	19 in. (483 mm)	18 in. (457 mm)	18 in. (457 mm)	18 in. (457 mm)
Outside Turning Radius	126.0 in. (3.2 m)	144 in. (3.66 m)	144 in. (3.66 m)	144 in. (3.66 m)	168 in. (4.27 m)	168 in. (4.27 m)
Drive	4 x 4	4 x 4	4 x 4	4 x 4	4 x 4	4 x 4
Engine	Perkins 1104D	Cummins QSB3.3T	Cummins QSB3.3T	Cummins QSB3.3T	Cummins QSB4.5T	Cummins QSB4.5T
HP @ RPM	84 hp @ 2,200 rpm	99 hp @ 2,400 rpm	99 hp @ 2,400 rpm	99 hp @ 2,400 rpm	130 hp @ 2,500 rpm	140 hp @ 2,500 rpm
Transmission	Hydrostatic	Powershift	Powershift	Powershift	Powershift	Powershift
Steering	All-Wheel	All-Wheel	All-Wheel	All-Wheel	All-Wheel	All-Wheel
Tires	12 x 16.5	370/75-28	370/75-28	400/75-28	400/75-28	400/75-28
Maximum Travel Speed	17 mph (27 kmph)	19.5 mph (31.4 kmph)	19.5 mph (31.4 kmph)	19.5 mph (31.4 kmph)	20 mph (32 kmph)	20 mph (32 kmph)
Frame Tilt Left/Right	—	±10 Degrees	±10 Degrees	±10 Degrees	±10 Degrees	±10 Degrees

\*Outriggers are required to achieve stated capacity.

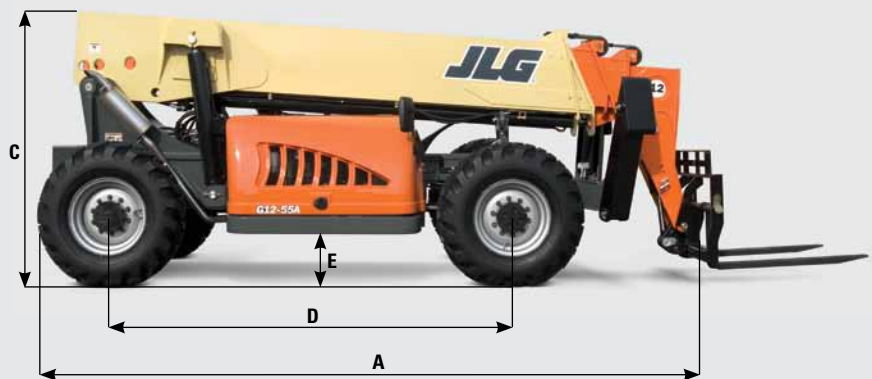

For complete specifications, visit [www.jlg.com](http://www.jlg.com)

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification. These machines meet or exceed ANSI/ITSDF B56.6-2005 as originally manufactured for intended applications.

**JLG Industries, Inc.**  
1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
**www.jlg.com**  
**An Oshkosh Corporation Company**

Form No.: JLG-TEL-BRO-1108  
Part No.: 3131573  
R021101  
Printed in USA

